



Lflex Couplings

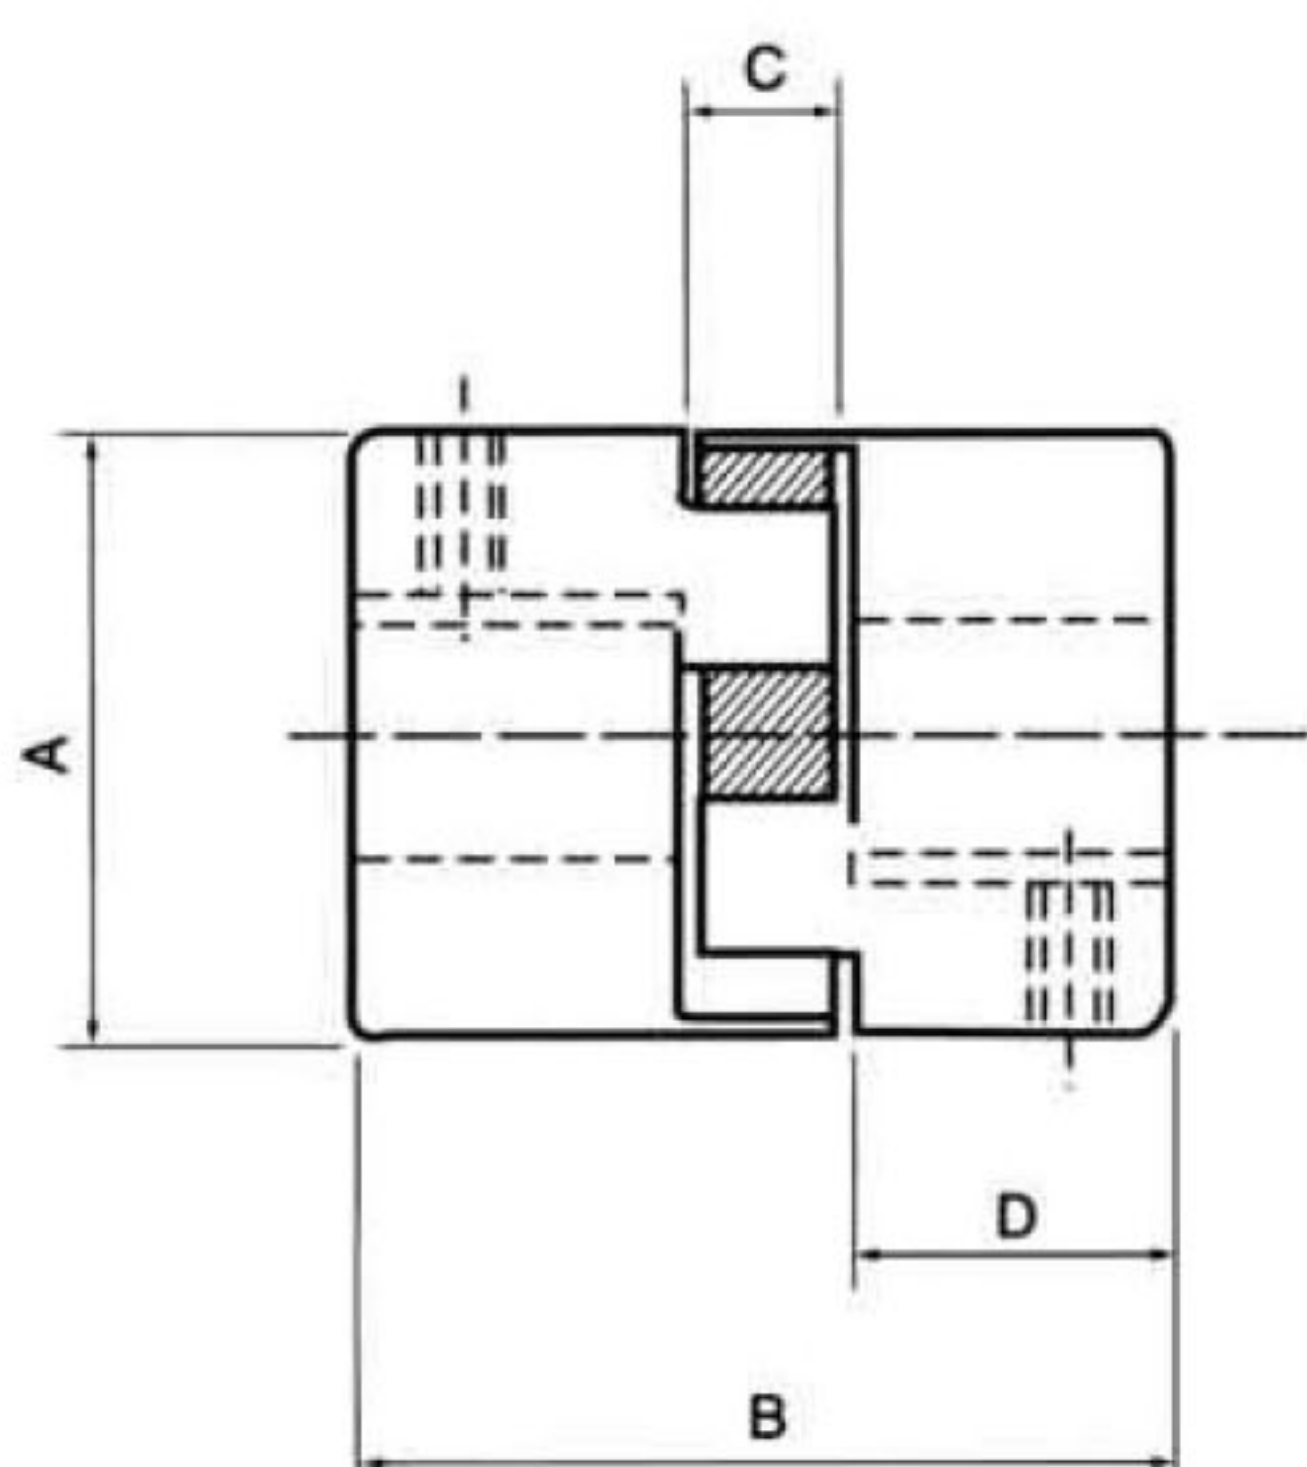

TYPE1

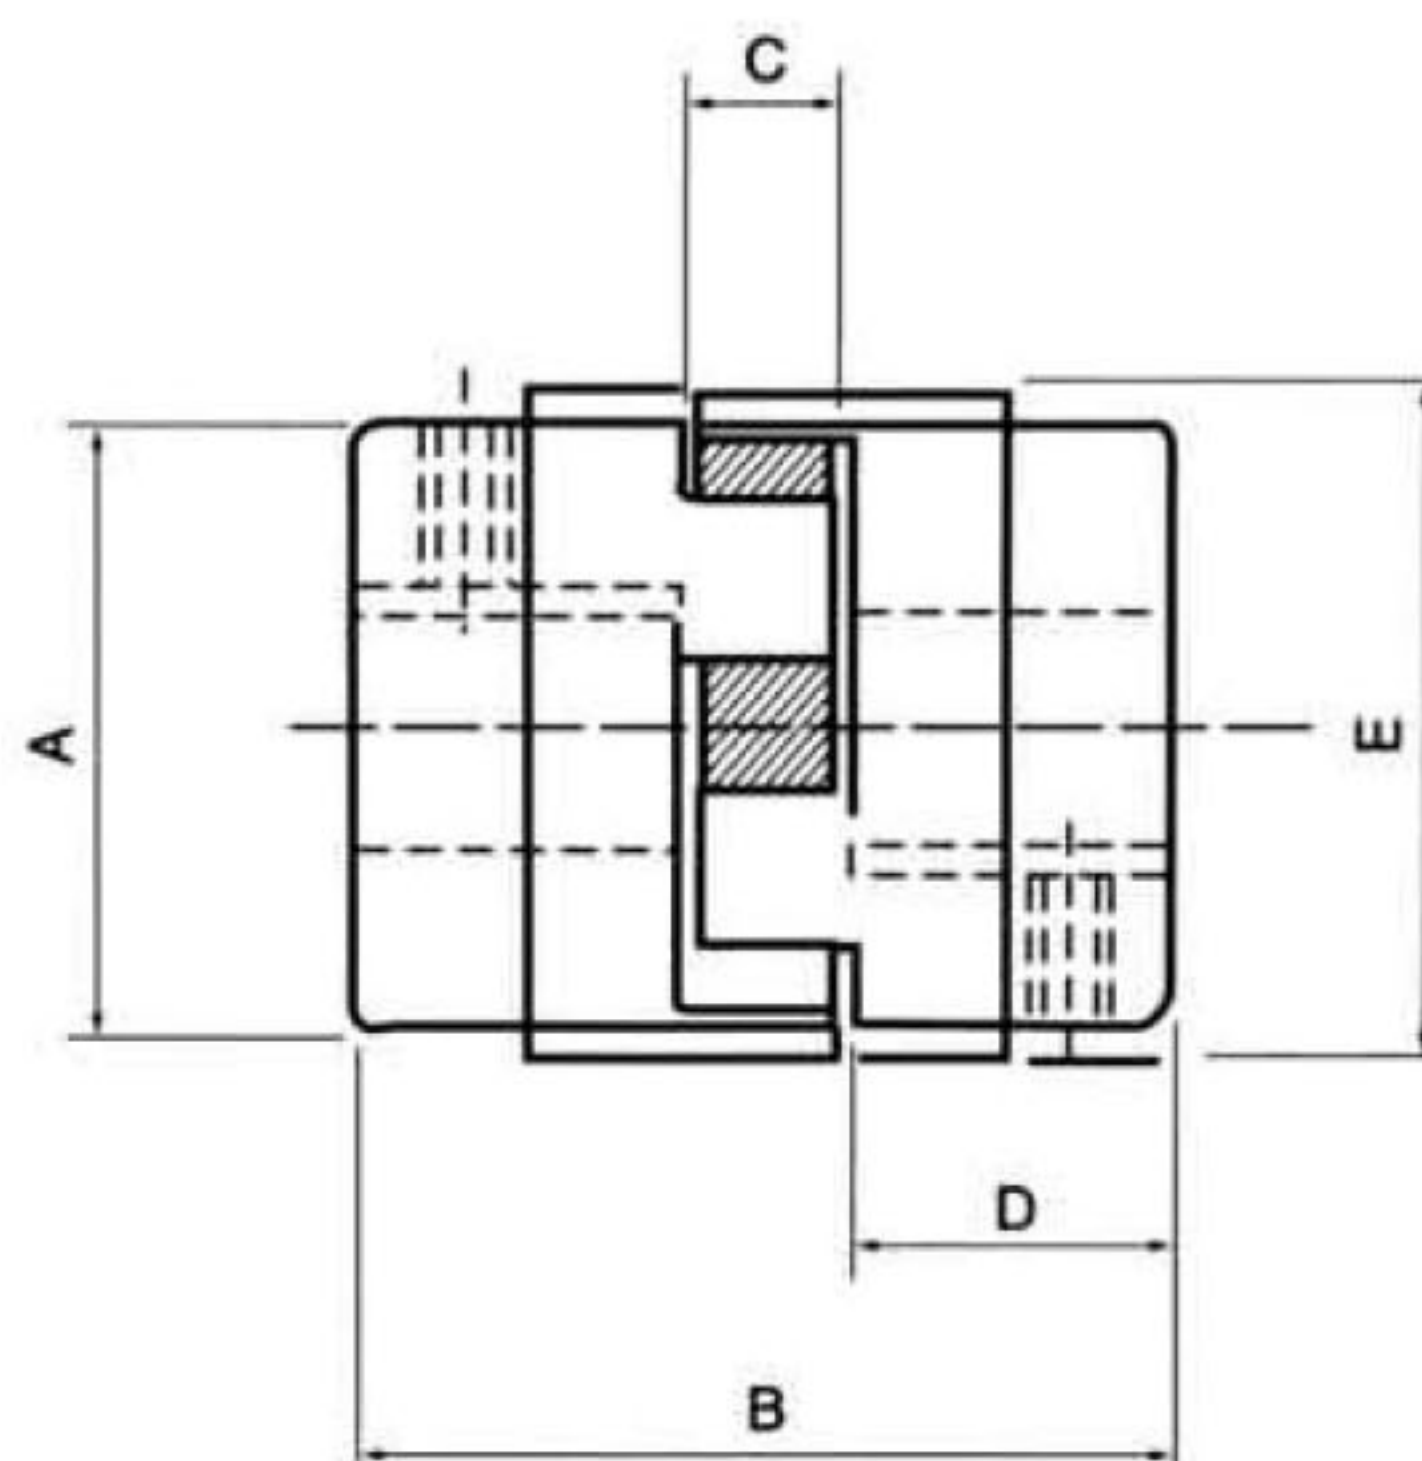

TYPE2

Dimensions sheet :

Coupling	Type	COUPLING HUBS							Weight	
		Dimension Inches						LBS		
		A	B	C	D	Stock Bore	E	Min Bore	Max Bore	
L070	1	1 23/64	2	1/2	3/4	1/4	-	0.59	0.54	
L075	1	1 3/4	2 1/8	1/2	13/16	1/4	-	1.00	0.86	
L090	1	2 7/64	2 1/8	1/2	13/46	1/4	-	1.48	1.32	
L095	1	2 7/64	2 1/2	1/2	1	7/16	-	1.75	1.52	
L099	1	2 17/32	2 7/8	3/4	1 1/16	1/2	-	2.5	2.17	
L100	1	2 17/32	3 1/2	3/4	1 3/8	7/16	-	3.42	2.92	
L110	1	3 5/16	4 1/4	7/8	1 11/16	5/8	-	6.45	5.61	
L150	1	3 3/4	4 1/2	1	1 3/4	5/8	-	8.95	7.73	
L190	2	4	4 7/8	1	1 15/16	3/4	4 1/2	8.83	7.04	
L225	2	4 1/4	5 3/8	1	2 3/16	3/4	5	12.28	9.6	

PERFORMANCE											
Coupling	Max Bore	Max RPM	Torque(Lbs)	Horsepower capacities At Indicated Speeds (RPM)							
				50	100	300	600	900	1200	1800	3600
L070	3/4	14000	44.1	0.035	0.07	0.21	0.42	0.63	0.84	1.26	2.52
L075	7/8	11000	88.2	0.070	0.14	0.38	0.76	1.26	1.68	2.52	1.04
L090	1	9000	145.0	0.115	0.23	0.69	1.38	2.07	2.76	4.14	8.28
L095	1 1/8	9000	189.0	0.015	0.30	0.90	1.80	2.70	3.60	5.40	10.80
L099	1 3/16	7000	315.0	0.250	0.50	1.50	3.00	4.50	6.00	9.00	18.00
L100	1 3/8	7000	416.0	0.330	0.66	1.98	3.96	5.94	7.92	11.9	23.80
L110	1 5/8	5000	788.0	0.630	1.25	3.75	7.50	11.30	15.00	22.5	45.00
L150	1 7/8	5000	1260.0	1.000	2.00	6.00	12.00	18.00	24.00	36.0	72.00
L190	2 1/8	5000	1702.0	1.350	2.70	8.10	16.20	24.30	32.40	48.6	97.20
L225	2 3/8	4200	2332.0	1.850	3.70	11.10	22.20	22.30	44.40	66.6	133.20